


EAST ADDITION, TOWNSITE OF KENAI, ALASKA

U. S. SURVEY No. 3025 A (BOUNDARIES)
U. S. SURVEY No. 3025 B (SUBDIVISION)

AREA, 10.485 ACRES
LATITUDE 60°23'00"N., LONGITUDE 151°13'05"W.,
AT CORNER NO. 1.

SCALE IN FEET

KENAI SPUR HIGHWAY

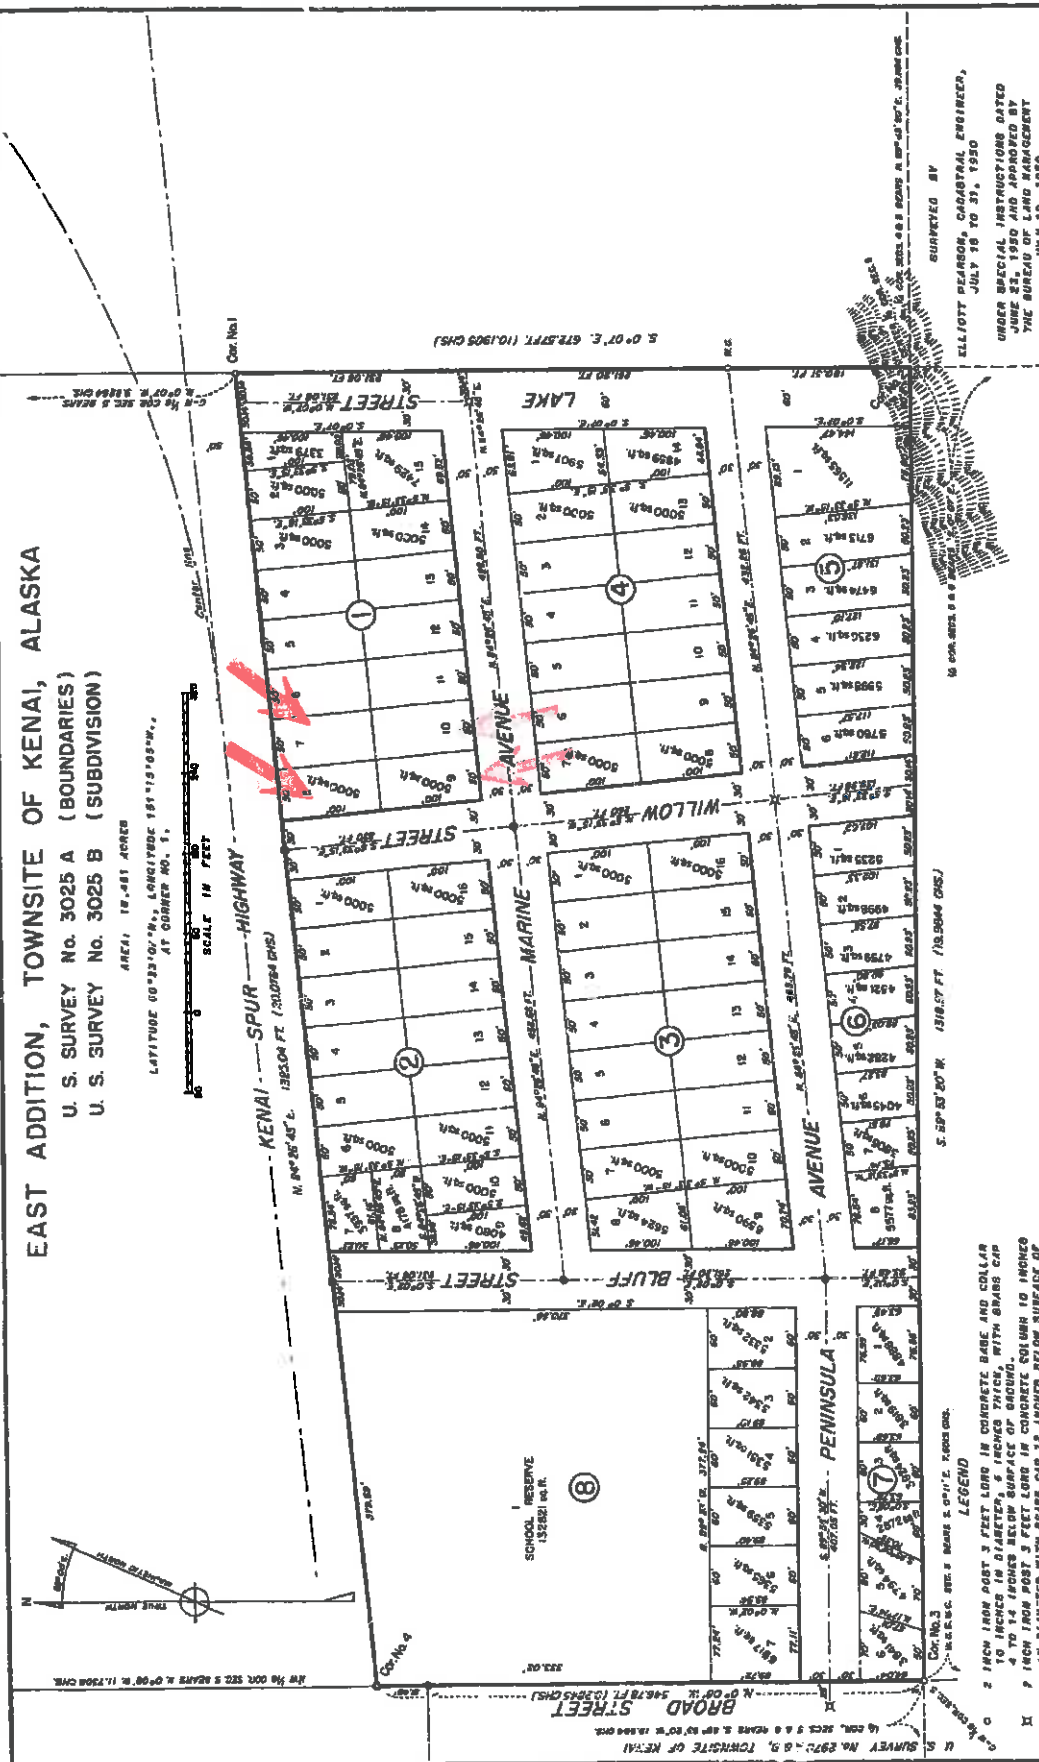

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
WASHINGTON, D. C., APRIL 4 1951

THIS PLAN IS STRICTLY CONFORMABLE TO THE APPROVED FIELD NOTES AND THE SURVEY, HAVING BEEN CORRECTLY EXECUTED IN ACCORDANCE WITH THE REQUIREMENTS OF LAW AND THE REGULATIONS OF THIS BUREAU, IS HEREBY ACCEPTED.

FOR THE DIRECTOR
William F. Hall
CHIEF, BRANCH OF SURVEYS

ELLIOTT BEARSON, CASARTAL ENGINEER,
JULY 18 TO 31, 1950
UNDER SPECIAL INSTRUCTIONS DATED
JUNE 23 1950 AND APPROVED BY
THE BUREAU OF LAND MANAGEMENT
JULY 18, 1950

5. 29° 35' 20" N. 1318.37 FT. (13.0844 CHS.)

LEGEND

- 2 INCH IRON POST 3 FEET LONG IN CONCRETE BASE AND COLLAR
- 4 INCHES IN DIAMETER 5 INCHES THICK, WITH BRASS CAP
- 4 TO 14 INCHES BELOW SURFACE OF GROUND.
- 7 INCH IRON POST 3 FEET LONG IN CONCRETE COLUMN TO INCHES
- IN DIAMETER WITH BRASS CAP 12 INCHES BELOW SURFACE OF
- GROUND.
- BRASS CAP 12 INCHES BELOW SURFACE OF GROUND IN CONCRETE
- COLUMN 10 INCHES IN DIAMETER AND 30 INCHES LONG.

ALL BLOCK AND LOT CORNERS WERE MONUMENTED WITH
2 X 2 X 10 INCH WOODEN STAKES

ALL STREET-CENTER-LINE MONUMENTS WERE SET ABOUT 12
INCHES BELOW THE SURFACE OF THE GROUND.

